




AR7057/30/2710CD25 RECESSED DOWNLIGHT

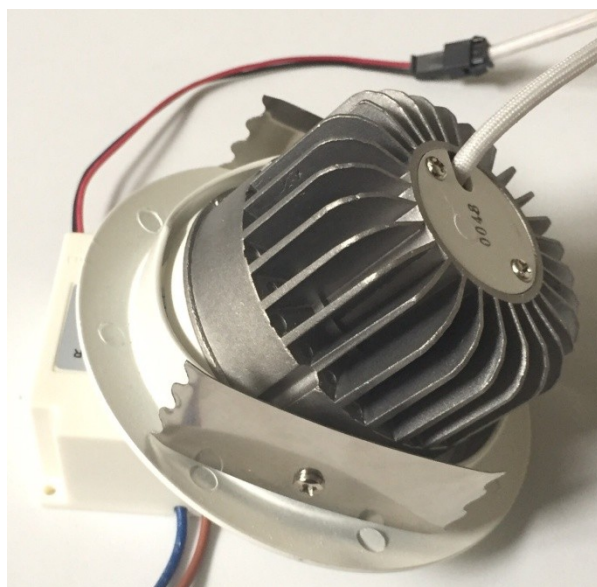

Specifications :

Model	AR705710CD25	AR703010CD25	AR702710CD25
Input	AC 100~240V		
Output	DC24V,350mA		
Power Consumption	10W±10%		
Power Factor	>0.6		
LED Source	EPISTAR From Taiwan		
LED Quantity	SMD3535×7pcs		
Beam Angle	25°		
CCT	5700K	3000K	2700K
CRI	>80		
Luminous Flux	1000 Lm	960 Lm	950 Lm
Illuminance@1M(25°)	5300 Lux	3350 Lux	1800 Lux
Illuminance@2M(25°)	1300 Lux	860 Lux	460 Lux
Illuminance@3M(25°)	630 Lux	420 Lux	210 Lux
Operating Temperature	0~40°C		
Storage Temperature	-20~60°C		
Dimensions	D×H=φ109×55mm		
Recessed Hole	φ90±5mm		
Weight	373g		
Made in	Taiwan		

Note: 2700K is standard product, 5700K/3000K are customized products.